

Premium Paver Cleaner & Degreaser

*Premium Efflorescence
& Rust Remover*

ALL AROUND CLEANER

- Remove Efflorescence
- Removing Rust Stains
- Etching Surfaces
- Removing Grout Smears




*Premium
Concrete &
Paver Degreaser*

- Removing Grease & Oil
- Removing Grout Smears
- Construction Dirt & Stains



Premium Paver Products

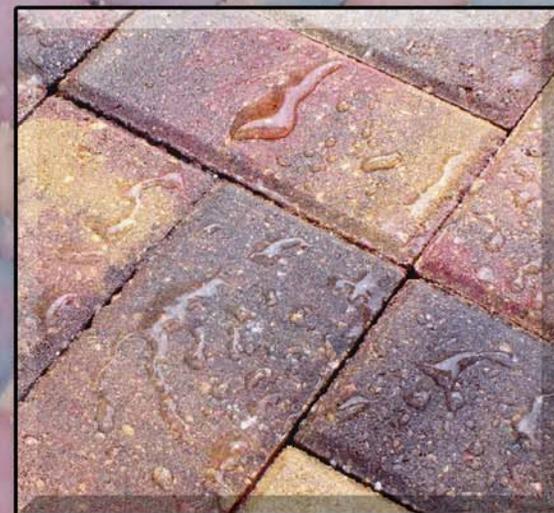

Clear Gloss Sealer / Finish

Paver Supply Warehouse

8249 Ulmerton Road
Largo, FL 33704

Phone: 727-524-6561

Fax: 727-536-8141

info@paversupplywarehouse.com



Exclusive Products of:

Paver Supply Warehouse

Why use Premium Paver Products?

Improves & Protects

- **Enhances Color**
- **Penetrates & Seals**
- **Protects From Staining**
- **Prevents Efflorescence**
- **Tough, Durable Finish**
- **Attractive Gloss Sheen**
- **Easy To Apply**



Before
Premium Paver Sealer



After
Premium Paver Sealer

Premium Paver Sealer



Available in 1 or 5 gallon cans

Clear Gloss Sealer/Finish

Specially formulated, high gloss clear sealer designed for application to brick pavers, concrete floors, and other cementitious floor type substrates. Its special solvent thinned 100% acrylic resin formulated provides an extremely durable finish that penetrates and seals the surface, while protecting the surface from powdering, oil and grease stains, and it resists moisture penetration. It dries fast, provides excellent wear resistance, adhesion, product versatility, is easy to apply, resists yellowing, and provides superior UV light resistance. Its high gloss finish enhances the color of the substrate, resists hot tire pick-up, seals and waterproofs the surface.

Directions for use:

Clean surface thoroughly, removing all grease, oil efflorescence and loose substances.

We suggest

PREMIUM PAVER DEGREASER

and

**PREMIUM PAVER EFFLORESCENCE &
RUST REMOVER**

for cleaning -

IMPORTANT: ALLOW PAVERS TO DRY COMPLETELY!

(Recommend 48-72 hours)

Reduce First Coat (optional) for maximum penetration by adding one quart Xylene to one gallon of

PREMIUM PAVER SEALER

Apply evenly with roller (recommended) or airless sprayer.

WAIT UNTIL DRY BEFORE APPLYING SECOND COAT

Apply evenly and use full strength
PREMIUM PAVER SEALER.

Tack free in one hour. Foot traffic in 24 hours.

Clean up with Xylene.

Store at room temperature. Sealing in humid conditions will cause moisture in pavers.

PAVERS MUST BE THOROUGHLY DRY



Paver Supply Warehouse

8249 Ulmerton Road
Largo, FL 33704

Phone: 727-524-6561

Fax: 727-536-8141

info@paversupplywarehouse.com